

**SALES CONTACTS**

 Western U.S. (970) 433-4335  
 Southern U.S. (940) 393-2894  
 Eastern U.S. (724) 549-1729

# HOLLOW PLUNGER


HSP Hollow Plungers are optimal for low gas and liquid production wells that are not able to successfully cycle a traditional solid plunger. Travel to surface time is excellent due to the buoyancy of the Hollow Plunger. It is made from a single piece of 4140 machined steel with the center core bored out. The core is bored from the bottom of the plunger, reducing weight of the plunger.

## FEATURES

- Single piece 4140 machined steel
- Bored out core
- No moving parts

## BENEFITS

- Available in multiple sizes and weights
- Lightweight without compromising durability
- Reinforced fishing neck

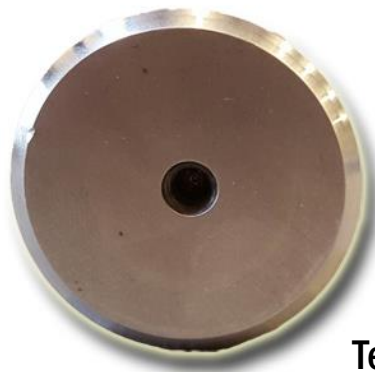

## Technical Specifications

Fall Rate (Ft/Min)	200 - 250
Size	2 - 3/8 in.
Length	16 in.
Plunger O.D.	1.900 in.
Fishing Neck Size	1 - 3/8 in.
Weight	4 - 10 lbs

For more information about Endurance Lift's plungers, lift systems and wellhead equipment, contact your local representative or email [service@plungerlift.com](mailto:service@plungerlift.com).

**RUN LONGER. PRODUCE MORE.**

[www.endurancelift.com](http://www.endurancelift.com)



**ENDURANCE**  
LIFT SOLUTIONS